


BAR LED L 10365






BAR LED M 10364

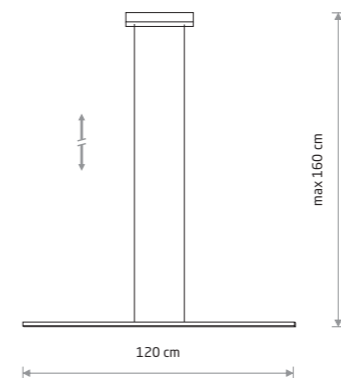

BAR LED S

■ painted aluminum, painted steel,
■ plastic PMMA


■ 10363 3000K ■ 10847 4000K

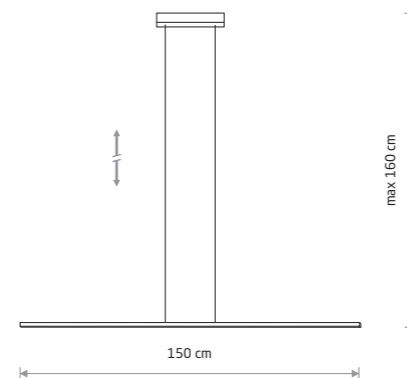

BAR LED M

■ painted aluminum, painted steel,
■ plastic PMMA

■ 10364 3000K ■ 10848 4000K

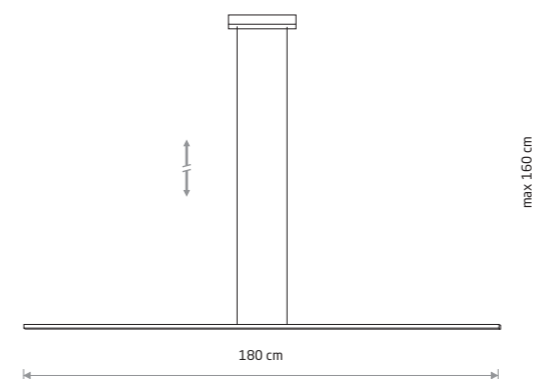

BAR LED L

■ painted aluminum, painted steel,
■ plastic PMMA

■ 10365 3000K ■ 10850 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10363	21W LED	3000K	1000 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10847	21W LED	4000K	1300 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10364	24W LED	3000K	1150 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10848	24W LED	4000K	1500 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10365	27W LED	3000K	1300 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10850	27W LED	4000K	1700 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h