


Downlights

MIDI LED 10055





MIDI LED 10048

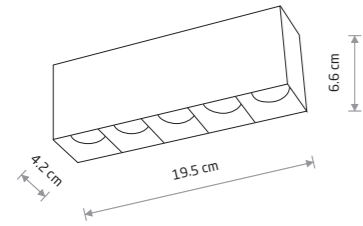


MIDI LED

painted aluminum

- 10048 3000K
 10052 4000K
- 10055 3000K
 10058 4000K



MIDI LED 10060

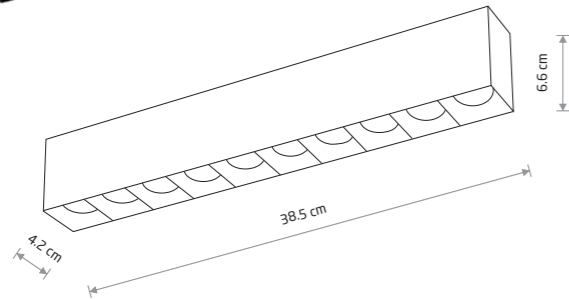

MIDI LED



painted aluminum

- 10050 3000K
 10053 4000K
- 10056 3000K
 10060 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10048	20W LED	3000K	1700 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10052	20W LED	4000K	1700 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10055	20W LED	3000K	1700 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10058	20W LED	4000K	1700 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10050	40W LED	3000K	3500 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10053	40W LED	4000K	3500 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10056	40W LED	3000K	3500 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h
10060	40W LED	4000K	3500 lm	36°	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h

☐ WHITE ■ BLACK



MIDI LED 10056

