


Fluo Wide

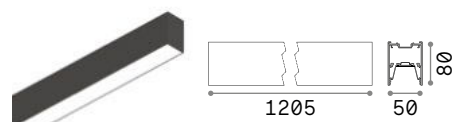


2,890 Kg/0,0183 m³
Cable length 2150 mm

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
27 W	105°	3750 lm	3000 K	White	192437
				Black	191997
		4050 lm	4000 K	White	192482
				Black	192505

DIMMABLE DRIVER* Optional

	Power	Output	Measure (LxHxW)	Code
1-10V	28 W	500 mA	280x21x30 mm	216423
DALI/Push	27 W	500 mA	280x21x30 mm	216287

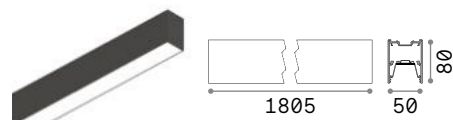

4,420 Kg/0,0257 m³
Cable length 2150 mm

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included


Power	Beam	Lumen	CCT	Finish	Code
36 W	105°	5050 lm	3000 K	White	192550
				Black	192567
		5300 lm	4000 K	White	192604
				Black	192628

DIMMABLE DRIVER* Optional

	Power	Output	Measure (LxHxW)	Code
1-10V	39 W	700 mA	280x21x30 mm	216416
DALI/Push	38 W	700 mA	280x21x30 mm	216270

MOUNTING KIT Required - Page 641

Light beam: WIDE

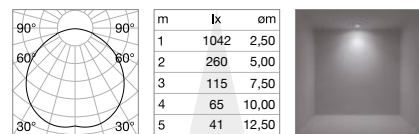


CRI≥83 27W 105° 4050lm 4000K


* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.



Fluo Wide 1200

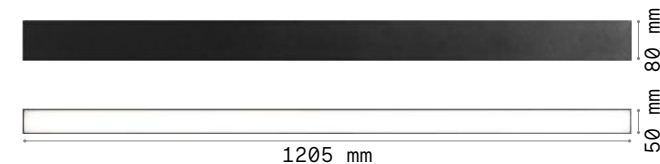

Fluo Wide 1800

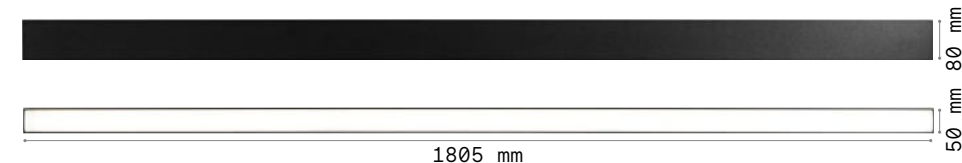

The single final cup is 2.5 mm width.

