Fluo Wide





2,890 Kg/0,0183 m³

Cable length 2150 mm

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included

Power	Beam	Lumen	CCT	Finish		Code
27 W	105°	3750 lm	3000 K	White		192437
				Black	■	191997
		4050 lm	4000 K	White		192482
				Black	■	192505

DIMMABLE DRIVER* Optional

	Power	Output	Measure (L x H x W)	Code
1-10V	28 W	500 mA	280 x 21 x 30 mm	216423
DALI/Push	27 W	500 mA	280 x 21 x 30 mm	216287





4,420 Kg/0,0257 m³

Cable length 2150 mm

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included


Power	Beam	Lumen	CCT	Finish		Code
36 W	105°	5050 lm	3000 K	White		192550
				Black	■	192567
		5300 lm	4000 K	White		192604
				Black	■	192628

DIMMABLE DRIVER* Optional

	Power	Output	Measure (L x H x W)	Code
1-10V	39 W	700 mA	280 x 21 x 30 mm	216416
DALI/Push	38 W	700 mA	280 x 21 x 30 mm	216270

MOUNTING KIT **Required - Page 641**

Light beam: WIDE



m	lx	øm
1	1042	2,50
2	260	5,00
3	115	7,50
4	65	10,00
5	41	12,50




CRI≥83 27W 105° 4050lm 4000K

* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.






Fluo Wide 1200

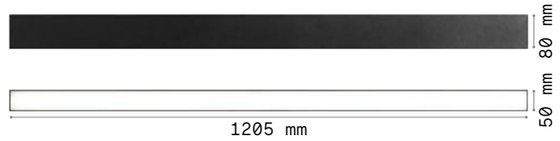

Fluo Wide 1800

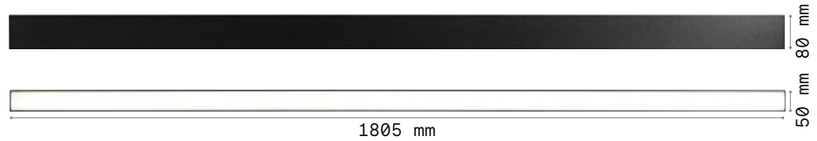

The single final cup is 2.5 mm width.