


Fluo Wide

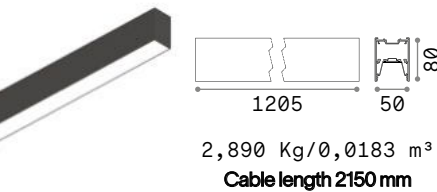


LED SMD SAMSUNG Driver TRIDONIC ON/OFF included

| Power | Beam | Lumen   | CCT    | Finish | Code   |
|-------|------|---------|--------|--------|--------|
| 27 W  | 105° | 3750 lm | 3000 K | White  | 192437 |
|       |      |         |        | Black  | 191997 |
|       |      | 4050 lm | 4000 K | White  | 192482 |
|       |      |         |        | Black  | 192505 |

DIMMABLE DRIVER\* Optional

|           | Power | Output | Measure (LxHxW)  | Code   |
|-----------|-------|--------|------------------|--------|
| 1-10V     | 28 W  | 500 mA | 280 x 21 x 30 mm | 216423 |
| DALI/Push | 27 W  | 500 mA | 280 x 21 x 30 mm | 216287 |

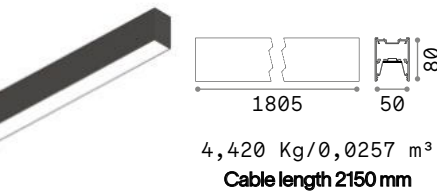

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included

| Power | Beam | Lumen   | CCT    | Finish | Code   |
|-------|------|---------|--------|--------|--------|
| 36 W  | 105° | 5050 lm | 3000 K | White  | 192550 |
|       |      |         |        | Black  | 192567 |
|       |      | 5300 lm | 4000 K | White  | 192604 |
|       |      |         |        | Black  | 192628 |

DIMMABLE DRIVER\* Optional

|           | Power | Output | Measure (LxHxW)  | Code   |
|-----------|-------|--------|------------------|--------|
| 1-10V     | 39 W  | 700 mA | 280 x 21 x 30 mm | 216416 |
| DALI/Push | 38 W  | 700 mA | 280 x 21 x 30 mm | 216270 |


MOUNTING KIT Required - Page 641

Light beam: WIDE

| m | lx   | om    |
|---|------|-------|
| 1 | 1042 | 2,50  |
| 2 | 260  | 5,00  |
| 3 | 115  | 7,50  |
| 4 | 65   | 10,00 |
| 5 | 41   | 12,50 |

CRI≥83 27W 105° 4050lm 4000K

\* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.

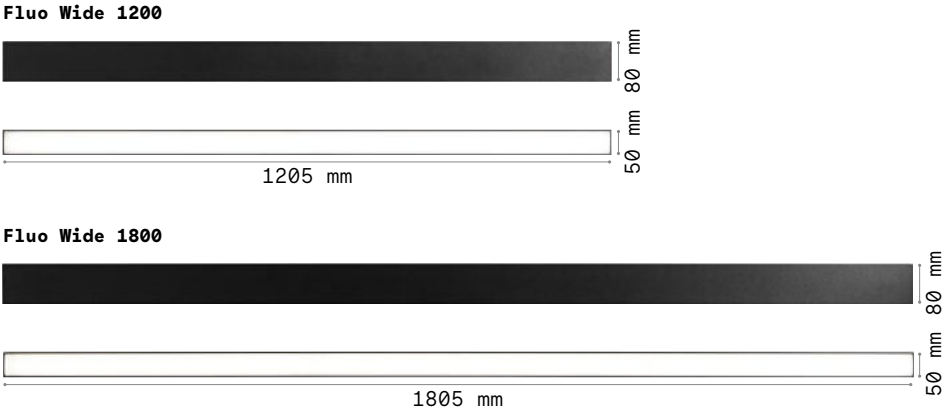

The single final cup is 2.5 mm width.

