


Fluo Wide

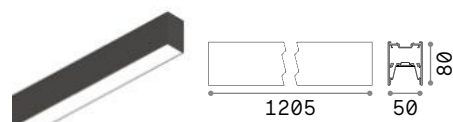


2,890 Kg/0,0183 m³
Cable length 2150 mm

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included

| Power | Beam | Lumen | CCT | Finish | Code |
|-------|------|---------|--------|--------|--------|
| 27 W | 105° | 3750 lm | 3000 K | White | 192437 |
| | | | | Black | 191997 |
| | | 4050 lm | 4000 K | White | 192482 |
| | | | | Black | 192505 |

DIMMABLE DRIVER* Optional

| | Power | Output | Measure (LxHxW) | Code |
|-----------|-------|--------|-----------------|--------|
| 1-10V | 28 W | 500 mA | 280x21x30 mm | 216423 |
| DALI/Push | 27 W | 500 mA | 280x21x30 mm | 216287 |

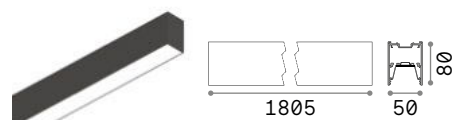

4,420 Kg/0,0257 m³
Cable length 2150 mm

LED SMD SAMSUNG Driver TRIDONIC ON/OFF included


| Power | Beam | Lumen | CCT | Finish | Code |
|-------|------|---------|--------|--------|--------|
| 36 W | 105° | 5050 lm | 3000 K | White | 192550 |
| | | | | Black | 192567 |
| | | 5300 lm | 4000 K | White | 192604 |
| | | | | Black | 192628 |

DIMMABLE DRIVER* Optional

| | Power | Output | Measure (LxHxW) | Code |
|-----------|-------|--------|-----------------|--------|
| 1-10V | 39 W | 700 mA | 280x21x30 mm | 216416 |
| DALI/Push | 38 W | 700 mA | 280x21x30 mm | 216270 |


MOUNTING KIT Required - Page 641

Light beam: WIDE

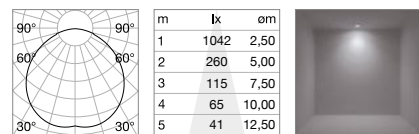


CRI≥83 27W 105° 4050lm 4000K


* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply. The linear connection is available only for the on-off versions of the products.

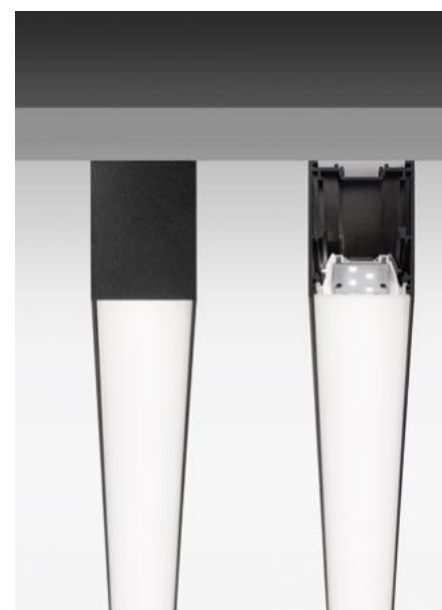

Fluo Wide 1200

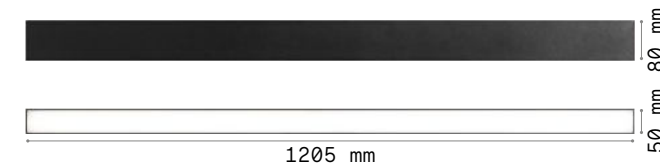

Fluo Wide 1800

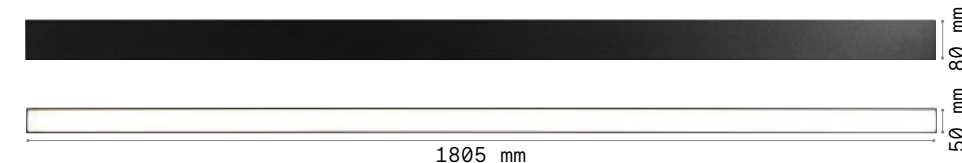

The single final cup is 2.5 mm width.

