


Basic Wide



LED SMD SAMSUNG Driver PHILIPS ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
10 W	85°	1150 lm	3000 K	White	193519
		1200 lm	4000 K	White	193403

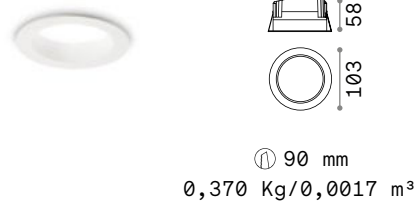

LED SMD SAMSUNG Driver PHILIPS ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
15 W	87°	1750 lm	3000 K	White	193526
		1800 lm	4000 K	White	193410
20 W		2400 lm	3000 K	White	193533
		2500 lm	4000 K	White	193427




LED SMD SAMSUNG Driver PHILIPS ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
30 W	90°	3050 lm	3000 K	White	193540
		3150 lm	4000 K	White	193434

DIMMABLE DRIVER* Optional

Model	Control	Power	Output	Measure (LxHxW)	Code
Basic 10 W	1-10V	12 W	300 mA	150 x 29 x 43 mm	218823
	DALI/Push	10 W	300 mA	130 x 30 x 43 mm	220772
Basic 15 W	1-10V	15 W	450 mA	150 x 29 x 43 mm	218830
	DALI/Push	17 W	450 mA	130 x 30 x 43 mm	220796
Basic 20 W	DALI/Push	25 W	700 mA	130 x 30 x 43 mm	220789
Basic 30 W	1-10V	31 W	900 mA	150 x 29 x 43 mm	218854
	DALI/Push	45 W	900 mA	150 x 30 x 43 mm	220802

Light beam: WIDE

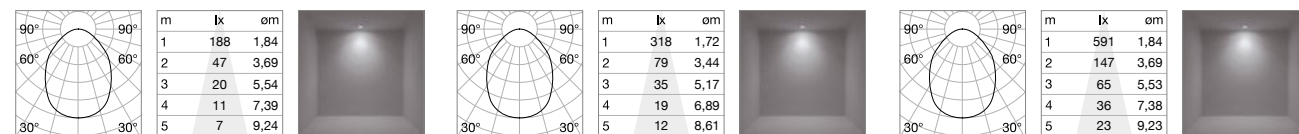

CRI≥80 10W 85° 1150lm 3000K

CRI≥80 15W 87° 1750lm 3000K

CRI≥80 30W 90° 3050lm 3000K

* The dimmable power supplies must be ordered in concomitance with the product and will be included inside the fittings by replacing the on-off power supply.

