


Oracle Slim Round

Suspended lamp consisting of a thin matt white or black painted aluminum frame and opal polycarbonate diffuser. Available in four different sizes. Integrated LEDs; available in 3000 K and 4000 K color temperatures and ON-OFF or DALI/Push control; CRI ≥ 80; LED useful life 20.000 h ; IP20 protection, insulation class II.

Source	LED SMD	LED life	20.000 h
Power	32W / 89W	Insulation class	II
Driver included	On/Off / DALI/Push	IP	20
Drivers available	No	Material	Aluminum
Beam	115°		
CCT	3000 K / 4000 K		
CRI	≥80		

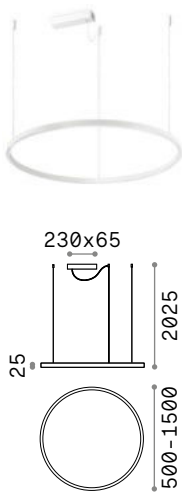

LED SMD Driver included

Measure	Weight	Volume	Power	Driver	Lumen	CCT	Finish	Code
ø 500	1,400 Kg	0,0376 m³	32 W	On-Off	3150 lm	3000 K	White	229461
						3000 K	Black	229492
						4000 K	White	269856
						4000 K	Black	304380
ø 700	1,100 Kg	0,0272 m³	29 W	DALI/Push	3000 lm	3000 K	White	304373
						3000 K	Black	304366
						3000 K	White	229485
						3000 K	Black	229515
ø 900	1,200 Kg	0,0534 m³	39 W	DALI/Push	4150 lm	3000 K	White	269863
						3000 K	Black	304410
						3000 K	White	304403
						3000 K	Black	304397
ø 1500	1,800 Kg	0,2212 m³	55 W	On-Off	5400 lm	3000 K	White	304373
						3000 K	Black	304366
						4000 K	White	229485
						4000 K	Black	229515
ø 1500	1,500 Kg	0,0857 m³	43 W	DALI/Push	4600 lm	3000 K	White	269863
						3000 K	Black	304410
						3000 K	White	304403
						3000 K	Black	304397
ø 1500	2,480 Kg	0,3072 m³	89 W	On-Off	9000 lm	3000 K	White	229478
						3000 K	Black	229508
						4000 K	White	269870
						4000 K	Black	304441
ø 1500	1,500 Kg	0,0857 m³	43 W	DALI/Push	4600 lm	3000 K	White	304434
						3000 K	Black	304427
						3000 K	White	265957
						3000 K	Black	285061
ø 1500	2,480 Kg	0,3072 m³	89 W	On-Off	9000 lm	3000 K	White	285078
						3000 K	Black	304472
						4000 K	White	304465
						4000 K	Black	304458

Cable length 2500 mm

