


Oracle Slim Round

Suspended lamp consisting of a thin matt white or black painted aluminum frame and opal polycarbonate diffuser. Available in four different sizes. Integrated LEDs; available in 3000 K and 4000 K color temperatures and ON-OFF or DALI/Push control; CRI ≥ 80; LED useful life 20.000 h; IP20 protection, insulation class II.

| | | | |
|-------------------|--------------------|------------------|----------|
| Source | LED SMD | LED life | 20.000 h |
| Power | 32W / 89W | Insulation class | II |
| Driver included | On/Off / DALI/Push | IP | 20 |
| Drivers available | No | Material | Aluminum |
| Beam | 115° | | |
| CCT | 3000 K / 4000 K | | |
| CRI | ≥80 | | |

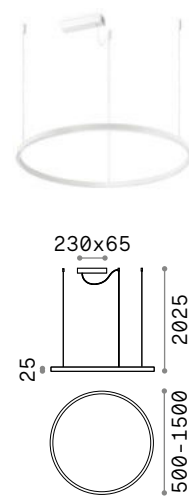

LED SMD Driver included

| Measure | Weight | Volume | Power | Driver | Lumen | CCT | Finish | Code | |
|---------|----------|-----------|-------|-----------|---------|---------|--------|--------|--------|
| ø 500 | 1,400 Kg | 0,0376 m³ | 32 W | On-Off | 3150 lm | 3000 K | White | 229461 | |
| | | | | | | 3000 K | Black | 229492 | |
| | | | | | | 3350 lm | 4000 K | White | 269856 |
| | | | | | | 4000 K | Black | 304380 | |
| ø 700 | 1,100 Kg | 0,0272 m³ | 29 W | DALI/Push | 3000 lm | 3000 K | White | 304373 | |
| | | | | | | 3000 K | Black | 304366 | |
| | | | | | | 4300 lm | 3000 K | White | 229485 |
| | | | | | | | 3000 K | Black | 229515 |
| ø 900 | 1,200 Kg | 0,0534 m³ | 39 W | DALI/Push | 4150 lm | 3000 K | White | 304403 | |
| | | | | | | 3000 K | Black | 304397 | |
| | | | | | | 4500 lm | 4000 K | White | 269863 |
| | | | | | | | 4000 K | Black | 304410 |
| ø 1500 | 2,480 Kg | 0,3072 m³ | 89 W | On-Off | 9000 lm | 3000 K | White | 265957 | |
| | | | | | | 3000 K | Black | 285061 | |
| | | | | | | 9650 lm | 4000 K | White | 285078 |
| | | | | | | | 4000 K | Black | 304472 |
| ø 1500 | 2,000 Kg | 0,3072 m³ | 76 W | DALI/Push | 7050 lm | 3000 K | White | 304465 | |
| | | | | | | 3000 K | Black | 304458 | |

Cable length 2500 mm

