


Universal Round new

Diffusive ceiling lamp for indoor ceiling or wall installation, suitable for general and uniform lighting. Varnished steel body with white finish, plastic diffuser. Integrated LED source, available in 4 different powers. LED useful life 17.500 h; protection IP20, insulation class II.

Source	LED SMD	Insulation class	II
Power	13,5W / 36W	IP	20
Driver included	On/Off	Material	Steel
Drivers available	No		
CCT	3000 K / 4000 K		
CRI	≥80		
LED life	25.000 h		




0,420 Kg/0,0015 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish		Code
13,5W	110°	1250 lm	3000 K	White		138596
			4000 K	White		321776

new

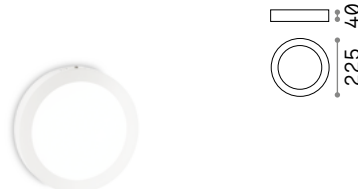

0,580 Kg/0,0025 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish		Code
19 W	110°	1950 lm	3000 K	White		138602
			4000 K	White		321752

new




0,850 Kg/0,0045 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish		Code
25 W	110°	2600 lm	3000 K	White		138619
			4000 K	White		321738

new

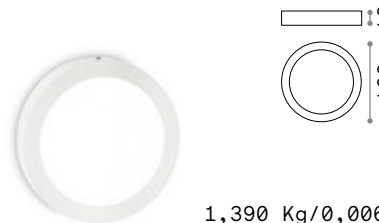

1,390 Kg/0,0068 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish		Code
36 W	110°	4300 lm	3000 K	White		240367
			4000 K	White		321684

new

