


# Oak

Gypsum or concrete body.  
Adjustable central bulb holder  
made of varnished metal.

 Item suitable for painting and varnishing.




<p>■ □ IP20</p> <p>1,730 Kg / 0,0082 m<sup>3</sup> GU10 max 1x35W</p> <p>150420 White 150437 Concrete</p> <p>3000 K 410 lm</p> <p>108292</p>	<p>■ □ IP20</p> <p>2,210 Kg / 0,0078 m<sup>3</sup> GU10 max 1x35W</p> <p>150468 White 150475 Concrete</p> <p>3000 K 410 lm</p> <p>108292</p>
--	--


 P. 076



# Tower

Plastic installing base with bayonet system. Total gypsum body. It fits replaceable GU10 bulbs.

 Item suitable for painting and varnishing.


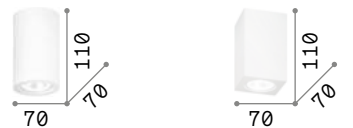


<p>■ □ IP20</p> <p>0,430 Kg / 0,0023 m<sup>3</sup> GU10 max 1x35W</p> <p>155869 White</p> <p>3000 K 410 lm</p> <p>108292</p>	<p>■ □ IP20</p> <p>0,620 Kg / 0,0023 m<sup>3</sup> GU10 max 1x35W</p> <p>155791 White</p> <p>3000 K 410 lm</p> <p>108292</p>
--	--



# Lika


Family of recessed rectangular LED modules in die-cast aluminium, painted black or white with polycarbonate reflector. Modules available with five lenses. Specially designed to avoid glare (UGR <16), best for installation in OFFICES and SHOPS.

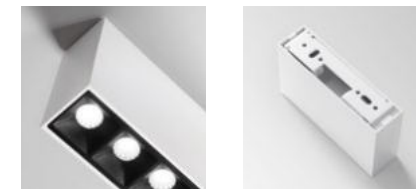

■ □ IP20

0,370 Kg / 0,0011 m<sup>3</sup>  
LED 12,5W / 1200 lm

248530 White  
244884 Black

 LED source 3000 K, 50.000 h life.

 P. 786