


### TUBE LED T8, 11W

glass

7500

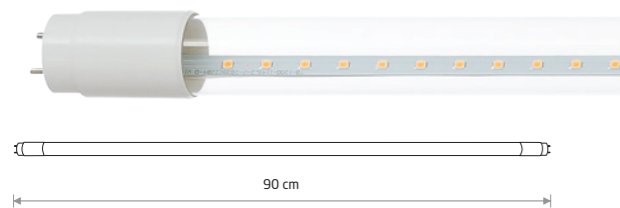

### TUBE LED T8, 16W

glass

7501




### TUBE LED T8, 22W

glass

7502

Item No.	Power	Colour temp.	Leds	Luminous flux	Beam angle	Colour Rendering Index (CRI 2)	Input	Power factor	Lifetime
7500	11W LED	3000K	SMD2835	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	>0.5	30000h
7501	16W LED	3000K	SMD2835	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	>0.5	30000h
7502	22W LED	3000K	SMD2835	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	>0.5	30000h

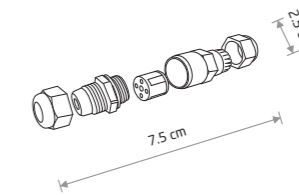


### WATERPROOF CONNECTOR IP68

plastic PA

8845

IP68

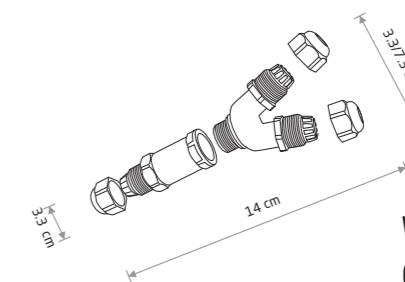


### WATERPROOF „Y” CONNECTOR IP68

plastic PA

8846

IP68

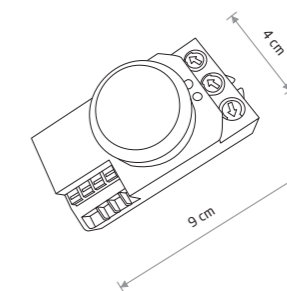

### MICROWAVE SENSOR

plastic

8821



### DUPLEX

plastic PC

9341

2xE27, max 40W