


Oracle Slim Round

Suspended lamp consisting of a thin matt white or black painted aluminum frame and opal polycarbonate diffuser. Available in four different sizes. Integrated LEDs; available in 3000 K and 4000 K color temperatures and ON-OFF or DALI/Push control; CRI ≥ 80; LED useful life 20.000 h; IP20 protection, insulation class II.

Source	LED SMD	LED life	20.000 h
Power	32W / 89W	Insulation class	II
Driver included	On/Off / DALI/Push	IP	20
Drivers available	No	Material	Aluminum
Beam	115°		
CCT	3000 K / 4000 K		
CRI	≥80		

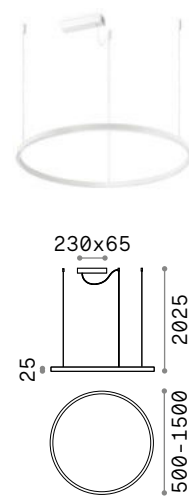

LED SMD Driver included

Measure	Weight	Volume	Power	Driver	Lumen	CCT	Finish	Code	
ø 500	1,400 Kg	0,0376 m³	32 W	On-Off	3150 lm	3000 K	White	229461	
						3000 K	Black	229492	
						3350 lm	4000 K	White	269856
						4000 K	Black	304380	
ø 700	1,100 Kg	0,0272 m³	29 W	DALI/Push	3000 lm	3000 K	White	304373	
						3000 K	Black	304366	
						4300 lm	3000 K	White	229485
							3000 K	Black	229515
ø 900	1,200 Kg	0,0534 m³	39 W	DALI/Push	4150 lm	3000 K	White	304403	
						3000 K	Black	304397	
						5400 lm	3000 K	White	229478
							3000 K	Black	229508
ø 1500	2,480 Kg	0,3072 m³	89 W	On-Off	9000 lm	3000 K	White	265957	
						3000 K	Black	285061	
						9650 lm	4000 K	White	285078
							4000 K	Black	304472
ø 1500	2,000 Kg	0,3072 m³	76 W	DALI/Push	7050 lm	3000 K	White	304465	
						3000 K	Black	304458	

Cable length 2500 mm

