


Oracle Slim Round

Suspended lamp consisting of a thin matt white or black painted aluminum frame and opal polycarbonate diffuser. Available in four different sizes. Integrated LEDs; available in 3000 K and 4000 K color temperatures and ON-OFF or DALI/Push control; CRI ≥ 80; LED useful life 20.000 h; IP20 protection, insulation class II.

Source	LED SMD	LED life	20.000 h
Power	32W / 89W	Insulation class	II
Driver included	On/Off / DALI/Push	IP	20
Drivers available	No	Material	Aluminum
Beam	115°		
CCT	3000 K / 4000 K		
CRI	≥80		

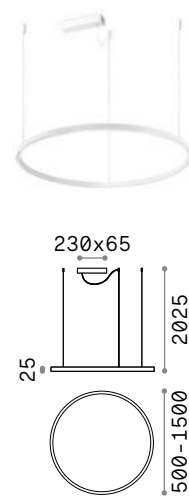

LED SMD Driver included

Measure	Weight	Volume	Power	Driver	Lumen	CCT	Finish	Code		
ø 500	1,400 Kg	0,0376 m³	32 W	On-Off	3150 lm	3000 K	White	229461		
							Black	229492		
							4000 K	White	269856	
							4000 K	Black	304380	
ø 700	1,100 Kg	0,0272 m³	29 W	DALI/Push	3000 lm	3000 K	White	304373		
							Black	304366		
							4300 lm	3000 K	White	229485
								3000 K	Black	229515
ø 900	1,200 Kg	0,0534 m³	39 W	DALI/Push	4150 lm	3000 K	White	304403		
							Black	304397		
							4500 lm	4000 K	White	269863
								4000 K	Black	304410
ø 1500	2,480 Kg	0,3072 m³	89 W	On-Off	9000 lm	3000 K	White	265957		
							Black	285061		
							9650 lm	4000 K	White	285078
								4000 K	Black	304472
ø 1500	2,000 Kg	0,3072 m³	76 W	DALI/Push	7050 lm	3000 K	White	304465		
							Black	304458		

Cable length 2500 mm

