

Universal Square ^{new}

Diffusive ceiling lamp for indoor ceiling or wall installation, suitable for general and uniform lighting. Varnished steel body with white finish, plastic diffuser. Integrated LED source, available in 4 different powers. LED useful life 17.500 h; protection IP20, insulation class II.

Source	LED SMD	Insulation class	II
Power	13,5W / 36W	IP	20
Driver included	On/Off	Material	Steel
Drivers available	No		
CCT	3000 K / 4000 K		
CRI	≥80		
LED life	25.000 h		



0,510 Kg/0,0015 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
13,5W	110°	1250 lm	3000 K	White	138633
			4000 K	White	321769

new



0,710 Kg/0,0025 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
19 W	110°	1950 lm	3000 K	White	138640
			4000 K	White	321745

new




1,070 Kg/0,0045 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
25 W	110°	2600 lm	3000 K	White	138657
			4000 K	White	321707

new

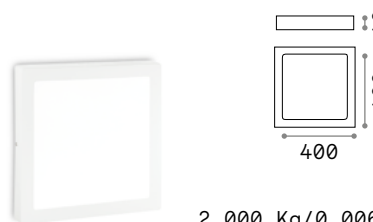

2,000 Kg/0,0068 m³

LED SMD Driver ON/OFF included

Power	Beam	Lumen	CCT	Finish	Code
36 W	110°	4300 lm	3000 K	White	240374
			4000 K	White	321660

new

